

MIDI Setup

MIDI

Select MIDI IN and MIDI OUT ports Prophet REV 2 is physically connected to.

The status text should display: Prophet REV 2: ON-LINE. If not connected then manually check GLOBAL settings on the Prophet REV 2.

For the PlugSE to communicate with the Prophet, the Global SysEx (system exclusive) settings should be set as follow:

- MIDI SysEx = USB or MIDI depending on connection
- MIDI Out = USB or MIDI depending on connection


The PlugSE controls more than a thousand Prophet REV 2 Voice and Sequencer parameters and is using NRPN commands that are received and transmitted. To enable NRPN controllers set:

- MIDI Controller Enable: ON
- MIDI Parameter Send: NRPN
- MIDI Parameter Receive: NRPN

GLOBAL Settings

GLOBALS

Once the MIDI communication is established, you can display all GLOBAL Prophet REV 2 settings:

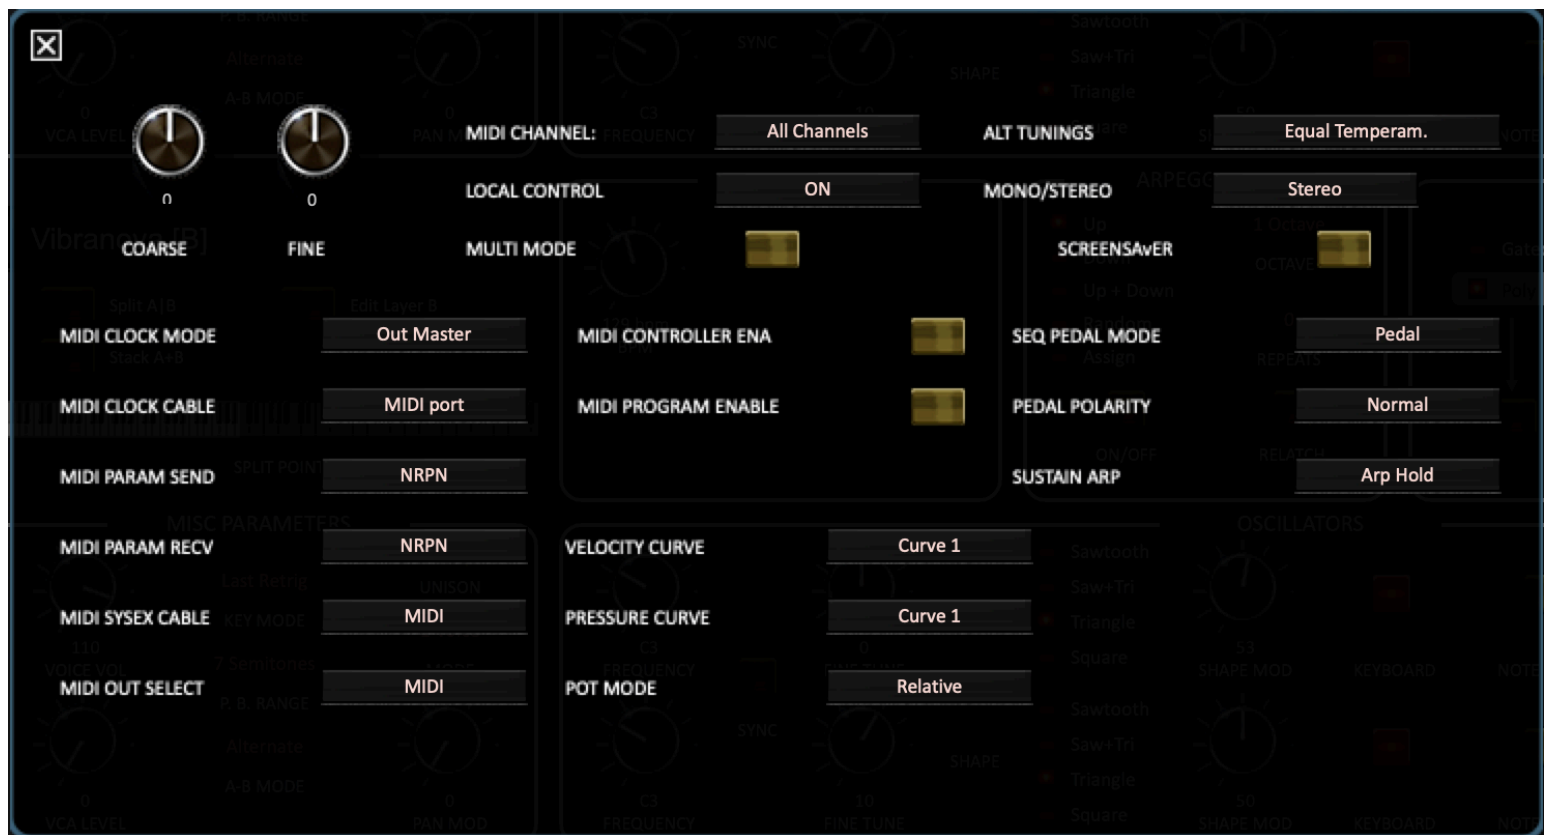

You can access and change all Global settings from here. However, you should not attempt to change the few of following like MIDI_SYSEX_CABLE, MIDI_OUT_SELECT, MIDI_PARAM and MIDI_CONTROLLER_ENA because you may lose the communication. If this happens, you will have to change back these settings manually on the Prophet REV 2.


All other settings you can safely change from this panel. All changes made here are not automatically saved if you power off the Prophet they will be reset to a previous state. In order to save them simply press the GLOBAL button directly on the Prophet REV 2 to enter and exit the Global mode and write all changes.

Prophet REV 2 Banks

BANKS

The screenshot shows the Prophet REV 2 software interface. At the top, there is a menu bar with options: BANKS, FILE, EDIT, MIDI, SEND, RECV, WRITE, Channel: 1, CLOCK / OSC, AMP / LPF, EFFECT / AUX, LFO, MODULATION, and CONTROLS. Below the menu bar, there are three tabs: FILE, MIDI, and PRESETS. On the left side, there is a vertical list of bank buttons: BANK U1, BANK U2, BANK U3, BANK U4, BANK F1, BANK F2, BANK F3, and BANK F4. The main area displays a list of programs under the 'U1 P1' bank. Each program entry includes a name, a category, and a status indicator (A). The programs listed are: LosVangelis2041 (Pads), All That Glitter (Arpeggiator), Le Matignon (Soft Bass), Balalaika2017 (Motion), Discovery Pad (Pads), BoiteMusique (Bells), Play Nice. (Keys), BigUnisonSync (Sync), Jungleizer (Percussion), Vibranova (Keys), Tweezurrr (Organs), Sons Pad (Pads), CloudyBass (Arpeggiator), Mod Me (Arpeggiator), Rutger Lead (Soft Lead), and Ultra Split (Keys). On the right side, there is a large 'PROPHET REV 2' logo and a grid of buttons for various sound categories: KEYS, ORGANS, STRINGS, SOFT LEAD, BRIGHT LEAD, RES LEAD, SYNC, SOFT BASS, BRIGHT BASS, RES BASS, SUB BASS, BRASS, INSTRUMENTS, EVOLUTION, MOTION, SYNTH, VOX, BELLS, HARMONICS, SEQUENCE, PERCUSSION, NOISE, SOUND FX, PADS, and ARPEGGIATOR. At the bottom right, there is an 'OK' button. The bottom left corner of the interface shows 'OFF-LINE'.

Using the bank panel you can access and select all programs in the Prophet REV 2 USER and FACTORY banks. In order to import all programs to the PlugSE use MIDI RECEIVE functions.

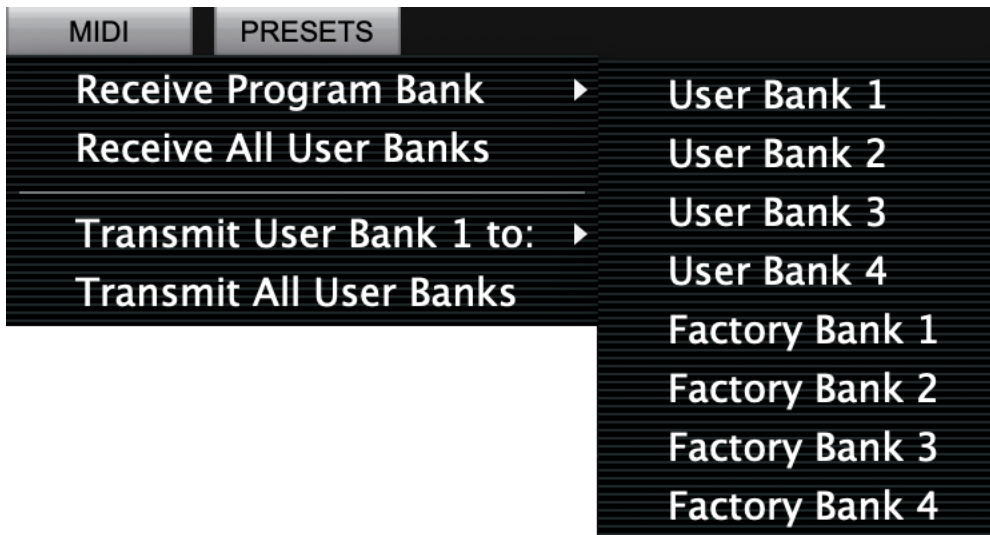

On the left of the Bank Panel there are BANK buttons that bring up a content of a selected bank. On the right side there are CATEGORY buttons that filter all USER programs according to a selected category. Double-clicking on the program list select a program on the Prophet and closes the Banks Panel.

You can import Program banks saved in files by clicking on the FILE button.

Supported formats are:-


- *.syx (Raw SysEx data) containing Prophet REV 2 program banks.
- *.rev2_b , Prophet REV 2 Editor bank files.

Bank files are loaded to the currently selected bank. If you select different bank destination, click on a different bank button to select another current bank.

If you like to revert or reload the original factory programs you can use the PRESET button. Again, like with the bank files, selected factory banks will be loaded to the currently selected bank.

Preset Manager / Librarian

Preset Manager and Librarian can be accessed from the File Menu or by click in on the top-left corner.

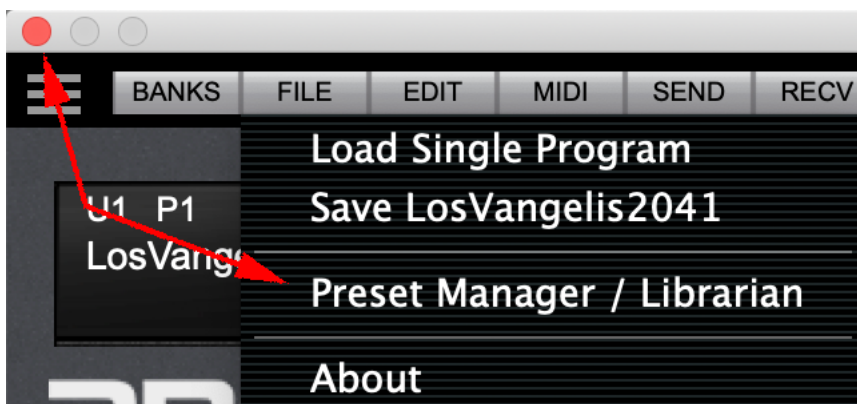

The Preset Manager window has two sections:

PRESET BANK

LIBRARY

Preset Bank Mode manages the preset bank that is used by the host. It is exactly the same list of presets that the VST/AU host displays for preset selection on a track.

LosVangelis2041

- All That Glitter
- Le Matignon
- Balalaika2017
- Discovery Pad
- BoiteMusique
- Play Nice.
- BigUnisonSync
- Jungleizer
- Vibranova**
- Tweezurrr
- Sons Pad
- CloudyBass
- Mod Me
- Rutger Lead
- Ultra Split
- Pizz I Cato
- FM Bass
- Horn Busker
- Robert Rock
- Escape 2 New York
- Prrg Nexus
- Windy Space Pad
- Intellect Lead
- Plush Pluck
- PolyTine
- Chariots
- Tangerillo Arp
- DeepSyncBass
- Marshmallow Pie
- Whist Pad
- Eventide
- Dirty Watergates
- Pixels
- ClassicBrass 24
- TribalTomArpWhl
- Organized
- Sitcom Piano
- Ice Bowl
- Skip Feet
- Jupiter Poor
- Dreamlines
- Big Chords
- VeloPluckster
- REVerent
- Sync Bass
- Kalimba Dance
- Futura Pad
- Kick 2 U
- Director's Cut
- AT Agro Bass
- Bright Keys
- Bass Reso Classi
- HoJo's Plucks
- Dull Vox Stereo
- Harpseechord
- Strangers
- Lush House
- Prophet Pad
- WaveFlavors
- GroovyGate
- Finger Bass
- Choir
- XfadePluck
- Kick 1 Time
- Delay lay lay la
- Can't Kill Me
- GatedCommunity
- Flyte Solo
- Cloud Save
- Dark Angels
- MassmorphWheel
- E Harp
- Rez Bass
- Vibranova

Prophet REV2 P1 2 MIDI 3 MIDI 4 MIDI 5 MIDI

Prophet REV2 P1	2 MIDI	3 MIDI	4 MIDI	5 MIDI

Prophet REV2 I

BANKS FILE EDIT MIDI SEND REC V WRITE Channel: 1

U1 P10
Vibranova
KEYS

CLOCK

129 bpm
BPM

PRESET BANK LIBRARY

1	LosVangelis2041	Pads
2	All That Glitter	Arpeggiator
3	Le Matignon	Soft Bass
4	Balalaika2017	Motion
5	Discovery Pad	Pads
6	BoiteMusique	Bells
7	Play Nice.	Keys
8	BigUnisonSync	Sync
9	Jungleizer	Percussion
10	Vibranova	Keys
11	Tweezurrr	Organs
12	Sons Pad	Pads
13	CloudyBass	Arpeggiator
14	Mod Me	Arpeggiator
15	Rutger Lead	Soft Lead

OFF-L

48 S S S S

60

none none

Unlike the Bank Manager, the Preset Manager or Preset List does not select physical programs from the Prophet REV 2 internal banks. Each VST or AU plug-in comes with its own separate preset bank. In case of the Prophet REV 2 plug-ins this is a totally separate bank that should not be confused with Prophet REV 2 USER or FACTORY banks that the PlugSE displays on the Bank Manager panel.

The PlugSE's preset bank comes preloaded with programs from the Prophet REV 2 Factory Bank 1 and therefore may look similar to Prophet REV 2 internal bank.

When you select programs in the Bank Manager, you are selecting programs in Prophet REV 2 internal banks using Bank/Program MIDI commands.

Selected programs are loaded from the internal banks to be played.

When you select select presets using the Preset Manager or Preset List then selected preset programs are send to the Prophet REV 2 to be played. Preset programs loaded in that way temporary replace programs in Prophet's so called Edit Buffer.


The Preset Program Bank data is saved within the VST/AU project and it is loaded bank when you open saved project.

Preset Manager Functions


LOAD - You can either replace the whole Preset Bank or just load one program to it. You load just one program, first select destination location on the list.

SAVE - Saves the whole Preset Bank or selected single presets.


SET CURRENT- inserts the currently playing preset program into the Preset Bank. Select a destination location on the list first. I will save Preset 10 Vibranov into a different slot.

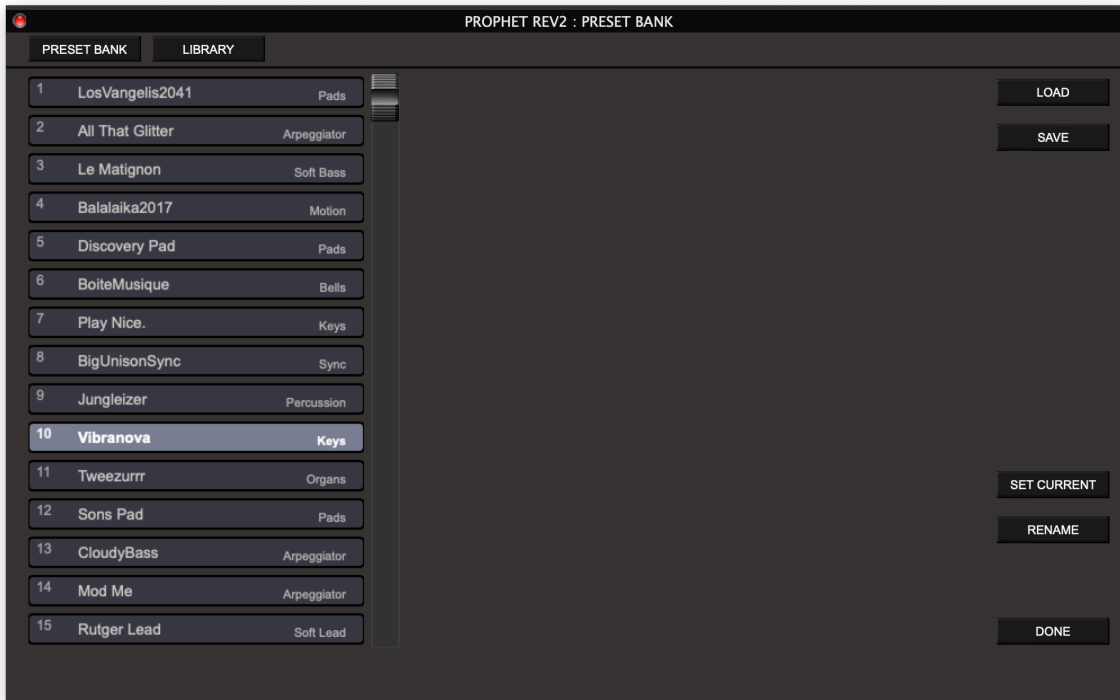



Click on SET CURRENT button and you will see this dialog:

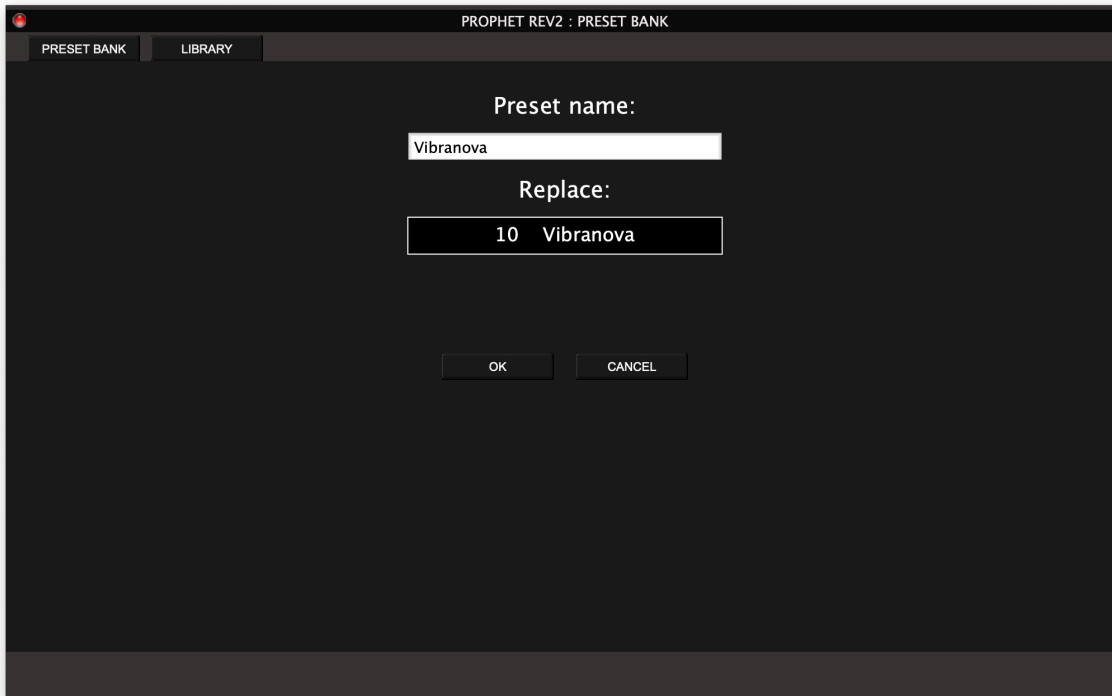

You can change the Preset's name and save it into a selected slot:

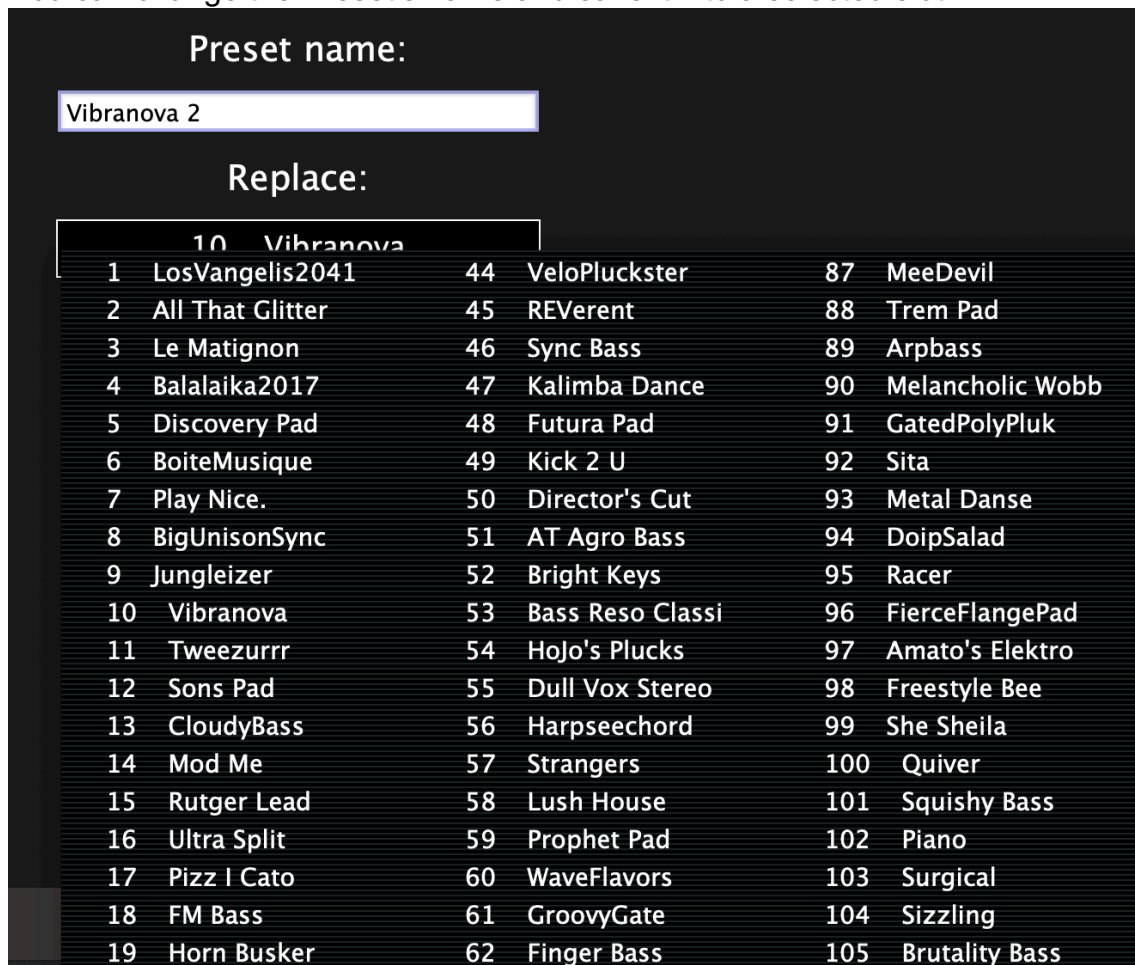

I will save it as Vibranova 2 into slot 11:

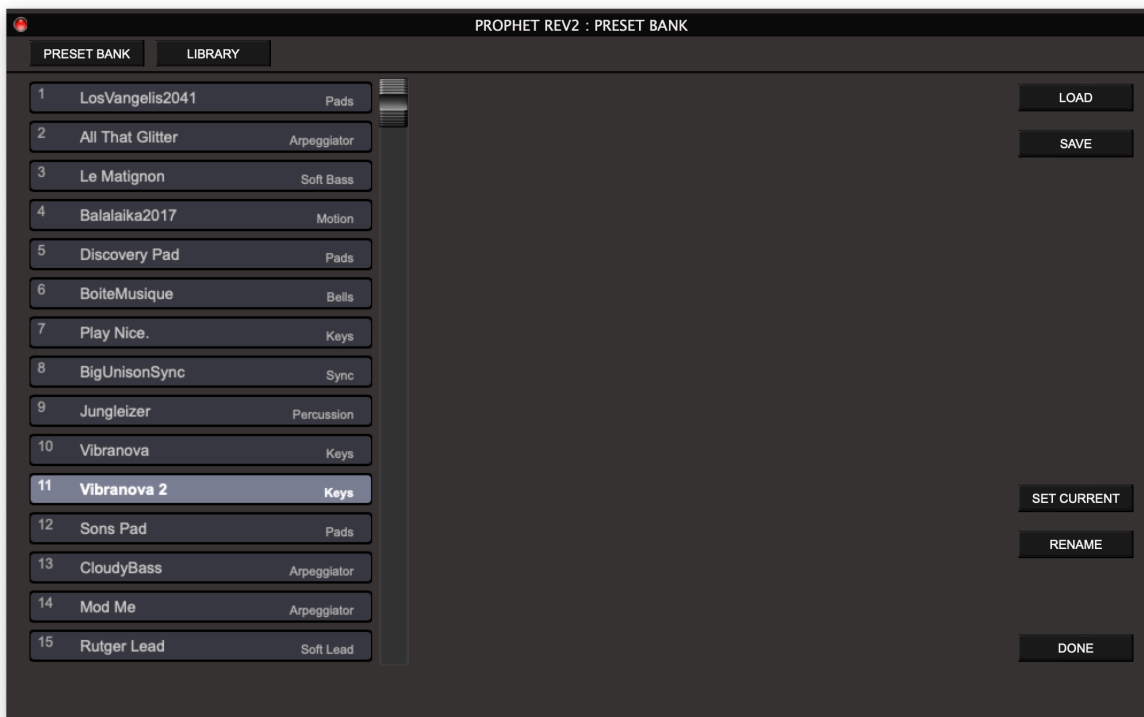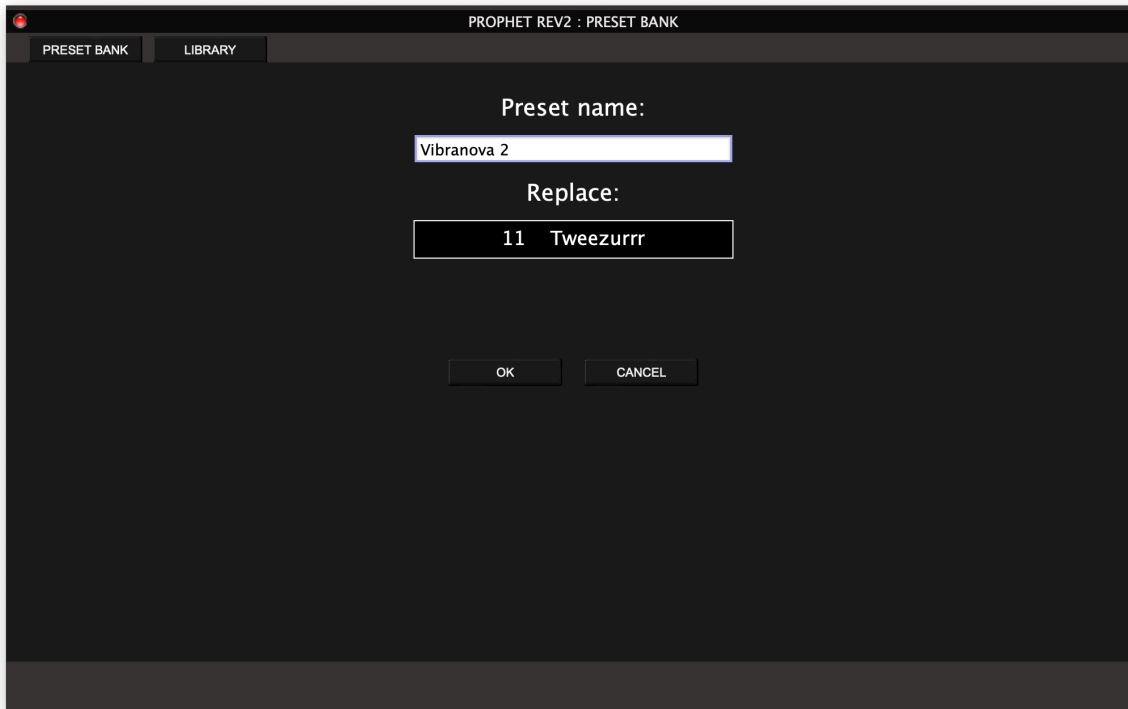

RENAME - Renames the selected Preset Program.

DONE – Exits the Preset Manager/Librarian.

LOAD


SAVE

SET CURRENT

RENAME

DONE

Librarian Mode provides an easy access to Prophet REV 2 librarian files where Prophet programs are organized and saved according to their assigned sound category. To switch to Librarian Mode click on the LIBRARY button. There are 30 category buttons under each the number of programs in that particular category is displayed.

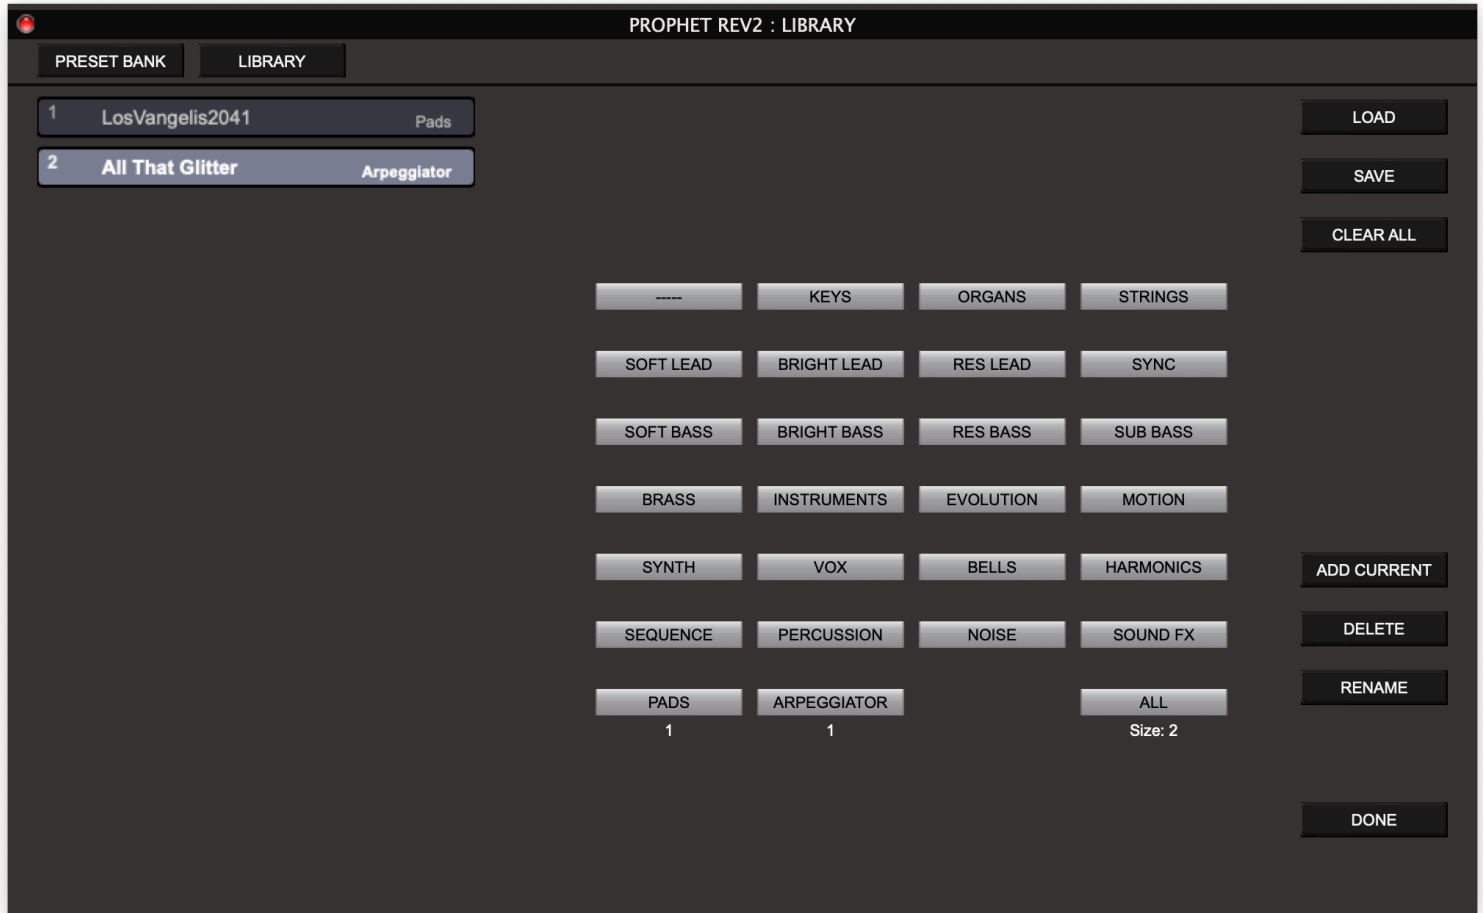

Library Mode Functions

LOAD - There are several options here.

- You can import Prophet REV 2 Library file that you prepared using the Prophet REV 2 editor (*.rev2_l file extension Format).
- *.syx (Raw SysEx data) containing Prophet REV 2 program banks.
- *.rev2_b , Prophet X Editor bank files.

You can also load programs from Prophet X USER and FACTORY program banks.

SAVE - The program library is saved automatically on exit You can also export it as a Prophet REV 2 editor Library file (*.rev2_l file extension Format).

CLEAR ALL - Deletes all programs from the library. You will be prompted to save it or cancel.

ADD CURRENT- adds the currently playing preset program to the library. You might be prompted to rename it.

DELETE - Removes the selected program from library.

RENAME - Renames the selected Preset Program.

DONE – Exits the Preset Manager/Librarian.

Computer keyboard shortcut keys:

Please note that the PlugSE window has to be in-focus in order for the computer keystrokes to work.

1 CLOCK / OSCILLATORS

2 LPF / AMP

3 EFFECT / AUX

4 LFO


5 MODULATION

6 CONTROLS

- **+**
O **P**
Octave – Increase / Decrease

- **+**
U **I**
Note Velocity – Increase / Decrease

Computer Keys Note Play assignment:

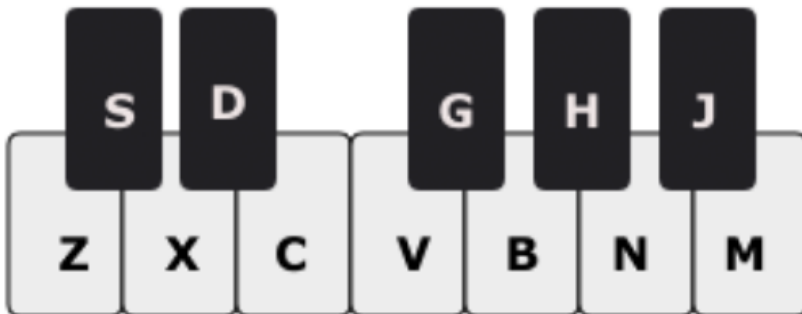

F5 Arp A Off / On

F6 Poly Sequencer Off / On